


Legends Direct Standard Retractable Awning Measuring Guide

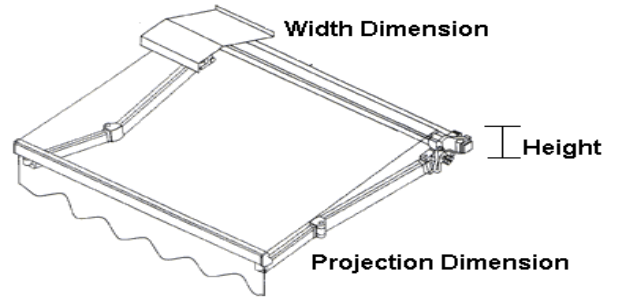


Dimensions:

Widths	Minimum = 12'3"	Maximum= 19'10"	
Projection	10 Feet		
Web Widths	12 ft	15ft	19ft
Actual Widths	12'3"	15'11"	19'10"


Installation Requirements:

A) Awning Width	12'3"	15'11"	19'10"
B) Frame Profile	Frame Height = 9"		
C) Hanging Height	Minimum = 7'6"	Maximum None	
D) Mounting Space	Minimum= 10" or review with customer service		

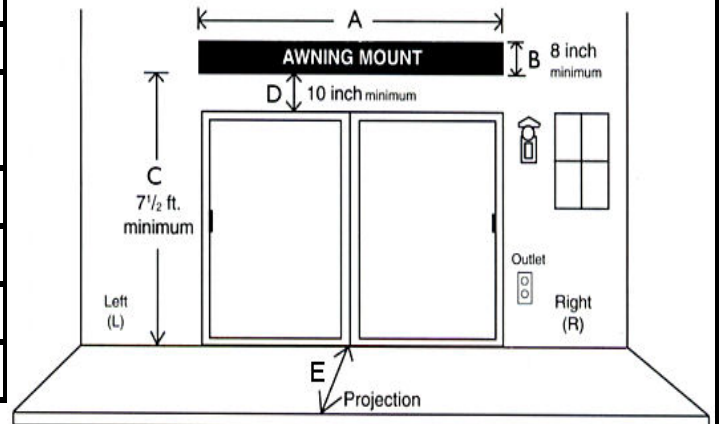

E) Roof Height	If not enough space to mount under		
Motor Cord Length	16' of cord comes from motor side of awning to reach power outlet. All 5'x6' and 6'x8' units comes with right hand motor only.		

Mounting Types	Standard Mount	Brick/ Stone Mount
	Roof Mount	Bay Window Mount
	Soffit Mount	Siding Mount

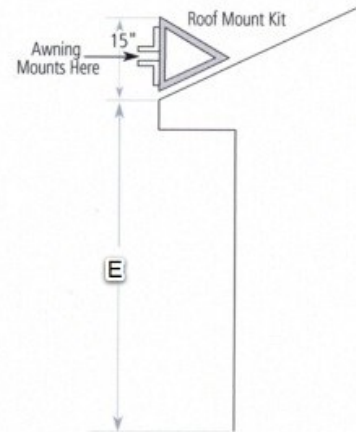

Optional Mounting Costs:

	Number Needed	Total Additional Costs
Siding Plates		
12 Footer	3	\$25
15 Footer	4	\$50
19 Footer	5	\$75
Soffit Brackets		
12 Footer	3	\$75
15 Footer	4	\$100
19 Footer	5	\$125
Roof Brackets		
12 Footer	3	\$225
15 Footer	4	\$300
19 Footer	5	\$375
Bay Mount Brackets		
All sizes	2	\$300

Directions:

- Measure along the side of your house to decide how wide an awning you want. Legends Direct offers 12', 15' and 19' widths.
- Be aware that the awning enclosure itself is 9 inches tall
- Awning hanging height needs to have a minimum clearance of 7'6" from deck or patio.
- Also measure to make sure you have at least 9-10 inches of clear unobstructed space horizontally along your wall below where the awning will fit against the house.
- If you do not have the proper space to mount awning under the soffit you will have to proceed with a roof mount installation and make sure you order the appropriate Optional Roof Mount brackets for the size awning you choose.
- Optional Bay Mount or optional Roof Mount or optional Siding Mount your awning. If you choose our Bay Mount option. If you choose our Roof Mount option and one of our Siding Mount options.